ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Pressure Relief Valves Series VS

Cat: 10VSCATR06-E Rev: 06 – 10/2011

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

1.0 Contents of specification

The specification concerns the function, the main features and the operation of the pressure relief valves Series VS and VST, as well as the admitted environmental and operating condition for the different executions. Operating conditions depend generally from the compatibility of the materials, components, surface finish, and, for the electric contacts and circuits, their degree of protection, with the operating conditions of the transformer.

2.0 Function

The pressure relief valve opens when the pressure inside the transformer's tank increases over the set operating value, following for example a failure or a short circuit, and by releasing oil reduces the pressure in the tank. By means of the electric contact, if present, and the optical indication the pressure relief valve indicates that a fault has taken place.

The pressure relief valves Series VST have been specially designed for use on transformers where an oil spillage is absolutely to be avoided; typical installation are on trains or ships or where environmental or safety standard are particularly exacting.

The oil-tight cover contains the oil released by the valve when opening and provides a flanged connection on which a pipe can be attached that ducts the oil in the desired direction

3.0 Construction features

The pressure relief valves Series VS are in accordance with standard EN 50216

3.1.0 Materials and components

- Flange, obturator, cover and electric contact's casing are of cast aluminium;
- Fittings are of stainless steel or nickel coated brass;
- Gasket materials as specified for the different executions;
- Splash diverter of Series VS is made of stainless steel;
- Springs are of spring steel, sandblasted and painted with epoxy powders;
- External screws are of stainless steel.

3.2.0 Reference drawings

Overall dimensions:

Pressure relief valves with contact type K

- Type VSQI 050 NKP - nominal diameter 50 mm — N° 10.050.40
- Type VS 080 NKP - nominal diameter 80 mm — N° 10.080.40
- Type VS 100 NKP - nominal diameter 100 mm — N° 10.100.40
- Type VS 150 NKP - nominal diameter 150 mm — N° 10.150.40

Pressure relief valves with contact type C

- Type VS 080 NCP - nominal diameter 80 mm — N° 10.080.30
- Type VS 100 NCP- nominal diameter 100 mm — N° 10.100.30
- Type VS 150 NCP - nominal diameter 150 mm — N° 10.150.30

Pressure relief valves without contact

- Type VSQI 050 NP - nominal diameter 50 mm — N° 10.050.30
- Type VS 080 NP - nominal diameter 80 mm — N° 10.080.40
- Type VS 100 NP- nominal diameter 100 mm — N° 10.100.40

- Type VS 150 NP - nominal diameter 150 mm N° 10.150.30

Reference part list 10VSNOMR00

The drawings show the valves complete with splash diverter.

Pressure relief valves with oil tight cover

- Type VST 080 N – VST 080 NK – nominal diameter 80 mm N° 10.T80.40
- Type VST-2 150 NK – VQT-2 150 NK – nominal diameter 150 mm N° 10.T15.40

Reference part list 10VSNOMR00

3.3.0 Construction

The pressure relief valves Series VS and VST are spring operated safety valves, consisting of a mounting flange with the central opening closed by a spring loaded obturator; the springs are compressed between obturator and cover or obturator and pressure ring for the valves with oil tight cover, which are assembled to the flange by columns.

No part of the pressure relief valve reaches inside the transformer tank. A specially designed gasket assures the oil-tightness between flange and obturator when the valve is closed.

The oil-tight cover of Series VST encases the valve completely and provides the flanged connection on which a pipe can be attached.

3.4.0 Pressure setting and springs

The setting of the pressure relief valves Series VS and VST is effected by choosing a different spring - for valve diameter 150 mm a double spring set – for every operating pressure value; therefore the setting of the pressure relief valve can be changed only at the factory, thus eliminating possible misuses.

The springs are of the compression type, designed so as to have a low force gain with the stroke.

Specification N° 10VSTARRxx indicates the tolerance of the setting and the minimum operating pressure for the different pressure settings as well as the minimum pressure at which the valve closes after operation. To avoid oil leakage or undue operation of the valve, the operating pressure must be chosen so that in normal operation the corresponding maximum operating pressure is never reached.

3.5.0 Operation indicators

3.5.1.0 Optical indicator

The pressure relief valves Series VS and VST have as a standard feature an optical indicator showing that the valve has operated; the optical indicator consists of a red pin showing about 30 mm over the top of the valve cover when the valve has operated because of an internal overpressure. The pin is spring loaded so that even after a partial opening of the valve due to limited or short-duration overpressures the pin is nevertheless expelled completely.

For Types VSQI 050, VST-2 150 and VQT-2 150 the optical indication operates also the electric contact, if present.

3.5.2.0 Electric contact

The operation of the pressure relief valve can be indicated also by electric contact, which can be of the “C” type, according to specification N° 10VSSCHCRxx or of the “K” type according to specification N° 10VSSCHKRxx.

3.6.0 Splash diverter and oil tight protection

To avoid that during the operation of the valve hot oil is shot in all directions, thus increasing the

danger to man and machine, the valves type VS 080, VS 100 e VS 150 can be fitted with a splash diverter, which diverts the out-flowing oil in a determined direction. Valves type VSQI 050 are always supplied with a splash diverter.

Valves type VST 080, VST-2 150 and VST-2 150 have a complete oil tight cover with a flange, where an oil drain pipe can be connected; the oil ejected by the valve can be picked up.

3.7.0 Oil-tightness and resistance to pressure

The pressure relief valves Series VS and VST:

- are oil tight to oil at 100°C up to pressure Pt, which depends on the setting pressure;
- are mechanically and electrically resistant to vacuum (10 torr);
- have a mechanical resistance to pressures up to 4 bars.

3.8.0 Resistance to dynamical stress

The pressure relief valves Series VS can operate without undue operation in following conditions:

- Sinus vibrations with frequency <= 120 Hz and amplitude <= 250 µ;
- Dynamical conditions causing following accelerations:
  - ◊ Max 3g in all directions, sinus vibration, amplitude <= 20 mm;
  - ◊ Shock condition with max 10 g in all directions.

3.9.0 Surface protection

Flange, obturator, cover and contact's casing are painted internally and externally with one primer coat of epoxy paint and externally with a finishing coat of polyurethane paint colour RAL 7031. The primer coat on the internal surfaces in contact is compatible with transformer mineral oil up to temperatures of 120°C.

The painting procedure is accepted by the Italian electricity authority ENEL.

The specification N° 00VERRxx describes in details all the features of the painting procedure.

4.0 Operation and installation

4.1.0 Operation

Should an overpressure inside the transformer tank build up due to short circuit or else, higher than the set operation pressure of the pressure relief valve, the obturator lifts from the flange propelled by the pressure, thus opening the discharge opening. The oil can flow out thus reducing the overpressure; at the same time the optical indication and if installed the electric contact show that the valve has operated. When the overpressure has been discharged the valve shuts again automatically to complete oil-tightness.

With the valves with oil tight cover the oil discharged remains inside the cover and can be ducted to an appropriate container by a pipe flanged to the cover, thus reducing the danger to persons or things as well as the pollution.

Thanks to the design of the pressure relief valves Series VS and their springs, the full opening is reached even for small overpressures in a very short time, so as to reduce immediately the resistance to the oil flow.

4.2.0 Importance of the electric contact

Real life tests have shown that failures of the transformer followed by sudden pressure increases, such as for instance short circuits, induce the operation of the pressure relief valve in time spans which are considerably shorter than that of other safety devices, such as the Buchholz Relay. **To**

exploit this rapid operation for the safety of the transformer we strongly advice to fit out the pressure relief valve with electric contacts, which should be connected to the trip circuit of the transformer.

4.3.0 Installation

The pressure relief valve should be installed, either in horizontal or vertical position, on the transformer tank, as near as possible to possible failure sources or in a central position to such sources. The size of the pressure relief valve should be chosen considering the available space and the oil quantity to be vented in case of failure.

For a higher safety standard and to increase the rapidity of operation it can be preferable to install more than one pressure relief valve eventually of a smaller size.

4.4.0 Choice of nominal pressure

To avoid oil leakage or undue operation of the valve, the operating pressure should be chosen so that in normal operation the corresponding maximum operating pressure is never reached. Furthermore, to reduce oil loss after operation, the minimum pressure at which the valve closes after operation should be always higher than the oil head insisting on the valve.

5.0 Compatibility

The installation compatibility of the pressure relief valves Series VS depend mainly from the material used for the gaskets; therefore the executions differ because of the used gaskets.

5.1.0 Standard execution – nitrile rubber gaskets (N)

Admitted operating conditions are:

Environmental conditions:

Ambient temperature	-20°C to +50°C
Relative humidity	95% to 20°C - 80% to 40°C - 50% to 50°C

Insulating liquid: transformer mineral or silicon oil

Temperature	- 20°C to + 110°C

5.2.0 Execution Nf - nitrile rubber gaskets for low temperatures (Nf)

Admitted operating conditions are:

Environmental conditions:

Ambient temperature	-40°C to +50°C
Relative humidity	95% to 20°C - 80% to 40°C - 50% to 50°C

Insulating liquid: transformer mineral or silicon oil

Temperature	- 40°C to + 120°C

5.3.0 Execution V – Fluor rubber gaskets (Viton V)

Admitted operating conditions are:

Environmental conditions:

Ambient temperature	-15°C to +50°C
Relative humidity	95% to 20°C - 80% to 40°C - 50% to 50°C

Insulating liquid: transformer mineral or silicon oil

Temperature	- 15°C to + 150°C

5.4.0 Special executions

For other environmental and/or operating conditions to be examined individually.

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

6.0 Identification of types

Taking for example pressure relief valve Type **VS 080 NCP 0,5**, which indicates:

- pressure relief valve series VS;
- nominal diameter 80 mm;
- with nitrile rubber gaskets N;
- with one contact type C;
- with splash diverter P
- with operating pressure 0,5 bars,

the pressure relief valves Series VS are identified as follows:

VS	**080**	**N**	**C**	**P**	**0,5**

	Series identification:
VS	Pressure relief valve Series VS, types VS 080, VS 100, VS 150
VSQI	Only for pressure relief valve type VSQI 050
VST	Pressure relief valve Series VS with oil tight cover – DN 80 mm
VST-2	Pressure relief valve Series VS with oil tight cover – DN 150 mm
VQT-2	Pressure relief valve Series VS with oil tight cover and flange with 6 holes – DN 150 mm

	Identification of nominal diameter:
050	Nominal diameter 50 mm
080	Nominal diameter 80 mm
100	Nominal diameter 100 mm
150	Nominal diameter 150 mm

	Identification of gasket type:
N	Nitrile rubber gaskets
Nf	Nitrile rubber gaskets for low temperatures
V	Fluor rubber gaskets (Viton)

	Identification of contact – see contacts specifications
…	Contact type …

	Optional splash diverter:
-	Without splash diverter or series VST valves
P	With splash diverter

	Operating pressure:
0,5	Operating pressure 0,5 bars

7.0 Reference specifications

- Setting tolerance — N° 10VSTARRxx
- Wiring diagrams and contacts
  - Contacts type C — N° 10VSSCHCRxx
  - Contacts type K — N° 10VSSCHKRxx
- Painting — N° /00VERRxx

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Specification N°	Accessory:	Page N°:
10VSSCHCR00-E	**Pressure relief valve Series VS - VST**	**1 of 1**

Title:	Revision:
Features contact type C	**00 – 10/10/99**

1.0 Features contact type C

The specification indicates the electrical and mechanical features as well as the admitted environmental conditions for the contact type C and its wiring.

2.0 Resetting of the contact

In standard execution the contact resets automatically when the valve closes after the overpressure is discharged. On request the contact can be supplied with manual reset and in this case the resetting of the contact after operation is obtained by acting on the spring that hooks the lever in the operating position.

3.0 Features

The contact type C is a mechanically operated sudden operation changeover microswitch with double interruption bedded in a protecting casing; it can have one or two contacts and the construction is usually Telemecanique.

- Telemecanique – one contact type — ZCK-J1
- Telemecanique – two contacts type — ZCK-J2
- Degree of protection — IP 66
- Standard cable gland — PG 13,5
- Cable gland on request — M20
- Resistance to vibrations (IEC 68-2-6) — 25g from 10 to 500 Hz
- Resistance to shock — 50g
- Protection against electric shocks — Class I according to IEC 536
- Contact resistance — ≤ 25 mOhms
- Standard interruption power ($1x10^5$ operations) — AC 250V-3,5A - 24V-10A
DC 24V-10W - 120V-4W
- Short life interruption power (100 operations) — DC 120V-150W
- Insulation to earth at 20°C — 2.500V
- Insulation of open contact at 20°C — 1.500V

4.0 Table of function and operation of contact

Wiring diagram N°	Terminal N°	Contact's position in NE	Description of wiring diagram
10-131C	13-14	Open	1 changeover contact, trips with overpressure; name of wiring diagram on type label = C
	21-22	Closed	
10-291C	14-13/23-24	Open	2 changeover contacts, trip with overpressure; name of wiring diagram on type label = 2C
	11-12/21-22	Closed	

Two contacts having the same function may not operate simultaneously.
If the contact is of the manual reset type, the letter **m** is added to the contact's name on the type label.
Notes:
NE = Normal operation; the pressure in the tank is lower than the setting pressure of the valve:
Wiring diagram N° = Identification number of the wiring diagram
Terminal N° = Identification of the terminals by numbers
Contact's position in NE = State of the contact in normal operation.

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

1.0 Features contact type K

The specification indicates the electrical and mechanical features as well as the admitted environmental conditions for the contact type K and it's wiring.

2.0 Resetting of the contact

In standard execution the contact must be reset manually after operation, when the valve closes after the overpressure is discharged, by acting on the hook that holds the lever in the operating position. By dismantling the hook, the contact resets automatically.

3.0 Features

The contact type K is a mechanically operated sudden operation changeover microswitch with one interruption; the microswitch is mounted inside an aluminium protecting case and the terminals are connected to a terminal board.

3.1.0 Standard contact (ST) - Crouzet type 83 169 4 or Matsushita

• Degree of protection	IP 67
• Lever and pushbutton	Stainless steel
• Contact material	Nickel coated silver
• Mechanical endurance of contact	$1x10^7$ cycles
• Temperature range	-40°C - +125°C
• Standard interruption power	AC 250V-5A - DC 125V-1A
• Short endurance interruption power (100 cycle)	DC 125V-1,5A
• Insulation to earth at 20°C	2.500V
• Insulation of open contact at 20°C	1.500V
• Minimum and maximum current	1,0 - 10A

3.2.0 Low current contact (BC) - Crouzet type 83 169 8

Contacts type BC are used only on request; features are identical to standard contact except for:

• Contact material	Gold alloy
• Minimum and maximum current and voltage	1 to 100mA - 4 to 30V

3.3.0 Electric circuit

• Degree of protection of protective casing	IP 65
• Material of casing	Cast aluminium
• Insulation to earth at 20°C	2.500V
• Material of terminals	tin coated brass

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

4.0 Table of function and operation of contact

Wiring diagram N°	Terminal N°	Contact's position in NE	Description of wiring diagram
10-131K	1-2	Open	1 changeover contact with manual reset, trips with overpressure; name of wiring diagram on type label = Km
	1-3	Closed	
10-291K	1-2 / 4-5	Open	2 changeover contacts with manual reset, trip with overpressure; name of wiring diagram on type label = 2Km
	1-3 / 4-6	Closed	

Two contacts having the same function may not operate simultaneously.
Notes:
NE = Normal operation; the pressure in the tank is lower than the setting pressure of the valve:
Wiring diagram N° = Identification number of the wiring diagram
Terminal N° = Identification of terminals by numbers
Contact's position in NE = State of the contact in normal operation.

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

1.0 Setting tolerance, operating pressure

The specification defines the terminology and indicates the setting pressure tolerance and all the other pressure values relevant for test and operation of pressure relief valves Series VS.

The performance of the pressure relief valve depends from the test fluid and the layout of the transformer tank. The pressure values listed in the table below are obtained by operating the valve with compressed air on a test bed having a volume of 150 dm^3.

2.0 Definitions

2.1.0 Nominal pressure – Pn

The nominal pressure is the setting pressure of the pressure relief valve, on which the tolerance must be applied in order to determinate the minimum and maximum operating pressure.

2.2.0 Minimum and maximum operating pressure - Pmin, Pmax

Minimum and maximum operating pressure are the limits of the pressure range inside which the pressure relief valve must operate.

2.3.0 Service pressure – Pe

The service pressure is the maximum pressure the pressure relief valve can withstand in continuous service without showing oil leakage or oil loss.

2.4.0 Closing pressure - Pc

The closing pressure is the minimum pressure at which the valve closes after operation. This value changes from valve type to valve type and the value in the table is the minimum of all valve types. This value is also very much affected by the type of fluid and the layout of the installation.

2.5.0 Tightness test pressure - Pt

The tightness test pressure is the minimum pressure that must be applied to the valve at the beginning of the leakage test. During the test the pressure may drop significantly provided it remains higher than the service pressure Pe.

3.0 Table of pressures

Pn [bar]	**Pmin** [bar]	**Pmax** [bar]	**Pe** [bar]	**Pc** [bar]	**Pt** [bar]
0,3	0,300	0,375	0,20	0,085	**Pmin - 0,15 bar**
0,4	0,380	0,460	0,30	0,17	
0,5	0,475	0,575	0,38	0,15	
0,6	0,570	0,660	0,50	0,20	
0,7	0,660	0,770	0,56	0,30	
0,8	0,760	0,864	0,66	0,35	
0,9	0,850	0,970	0,75	0,40	
1,1	1,100	1,180	0,90	0,55	
1,3	1,300	1,400	1,00	0,65	
1,5	1,500	1,600	1,30	0,80	

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Nomenclature N°:	Reference drawings N°:	Page N°
10VSNOMR00-E	**10.050.30 – 10.050.40 – 10.080.30 – 10.080.40 10.100.30 - 10.100.40 – 10.150.30 – 10.150.40**	**1 of 2**

Product:	Revision N°
Pressure relief valves Series VS	**00 of 10.10.2011**

Pos.	Part Denomination	N°	Material & Reference
1.0	Valve body with mounting flange	1	Aluminium
1.0.1	Gasket seat – gasket supplied with valve:		Material according to type
	• Type VSQI 050 – dwg. 10.050.30 – 10.050.40	1	OR6287 – Ø 72,39 x 5,34 mm
	• Type VS 080 – dwg. 10.080.30 – 10.080.40		OR6375 - Ø 94,62 x 5,34 mm
	• Type VS 100 - dwg. 10.100.30 – 10.100.40		OR8462 - Ø 116,8 x 6,99 mm
	• Type VS 150 - dwg. 10.150.30 – 10.150.40		OR8675 - Ø 170,8 x 6,99 mm
1.1	Gaskets holding ring	1	Brass
1.2	Oil tightness and operation gaskets	1/2	Material according to type
1.2.1	Main oil tightness gasket		Reference
	• Type VSQI 050 – dwg. 10.050.30 – 10.050.40	1	Dwg. 10.050.215
	• Type VS 080 – dwg. 10.080.30 – 10.080.40		Dwg. 10.080.120
	• Type VS 100 - dwg. 10.100.30 – 10.100.40		Dwg. 10.100.015
	• Type VS 150 - dwg. 10.150.30 – 10.150.40		Dwg. 10.150.135
1.2.2	Lateral operation gasket		Reference
	• Type VS 080 – dwg. 10.080.30 – 10.080.40	1	OR6412 - Ø 104,12 x 5,34 mm
	• Type VS 100 - dwg. 10.100.30 – 10.100.40		OR208 - Ø 130,2 x 5,34 mm
	• Type VS 150 - dwg. 10.150.30 – 10.150.40		Dwg. 10.150.139
1.3	Connecting columns of flange and cover		
	• Type VSQI 050 – dwg. 10.050.30 – 10.050.40	4	Stainless steel
	• Type VS 080 – dwg. 10.080.30 – 10.080.40	4	
	• Type VS 100 - dwg. 10.100.30 – 10.100.40	4	
	• Type VS 150 - dwg. 10.150.30 – 10.150.40	8	
1.3.1	Columns holding screws and washers		
	• Type VSQI 050 – dwg. 10.050.30 – 10.050.40	4	Stainless steel
	• Type VS 080 – dwg. 10.080.30 – 10.080.40	4	
	• Type VS 100 - dwg. 10.100.30 – 10.100.40	4	
	• Type VS 150 - dwg. 10.150.30 – 10.150.40	8	
	Attention: never unscrew these screws		
2.0	Shutter	1	Aluminium
2.0.1	Contact activating nose	1	
2.1	Air vent screw	1	Nickel coated brass
2.2	Air vent screw gasket		Material according to type
	• Type VSQI 050	1	G12 x 5 x 3
	• Type VS 080 – VS 100 – VS 150		OR2018 - Ø 4,48 x 1,78 mm
3.0	Pressure setting springs		
	• Type VSQI 050 – VS 080 – VS 100	1	Spring steel, sandblasted and powder paint coated
	• Type VS 150	2	

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Nomenclature N°:	Reference drawings N°:	Page N°
10VSNOMR00-E	**10.050.30 – 10.050.40 – 10.080.30 – 10.080.40 10.100.30 - 10.100.40 – 10.150.30 – 10.150.40**	**2 of 2**

Product:	Revision N°
Pressure relief valves Series VS	**00 of 10.10.2011**

Pos.	Part Denomination	N°	Material & Reference
4.0	Spring holding cover	1	Aluminium
4.1	Optical indicator	1	
4.1.1	Optical indicator holding screw	1	Stainless steel
4.2	Splash diverter	1	Stainless steel
4.2.1	Splash diverter holding screws	4	Stainless steel
5.0	Contact type C	1	Simple or double
5.0.1	Contact cable entry	1	Standard M20 thread Other threads on request
5.1	Contact support	1	Aluminium
5.1.1	Contact support holding screws	3	Stainless steel
5.2	Contact operating lever with adjustment sled	1	Brass & stainless steel
5.2.1	Contact's manual resetting device	1	Stainless steel
5.2.2	Contact's manual resetting device spring	1	Stainless steel
6.0	Contact type K assembly		
6.1	Contact case with support	1	Aluminium
6.1.1	Contact case holding screws	3	Stainless steel
6.1.2	Contact case cable entry	1	Standard M20 thread Other threads on request
6.2	Contact case cover	1	Aluminium
6.2.1	Contact case cover gasket	1	Material according to type
6.2.2	Contact case cover holding screws	3 - 4	Stainless steel
6.3	Contact operating lever with adjustment sled NB: For type VSQI 050 the optical indicator also works the contact	1	Stainless steel
6.3.1	Contact's manual resetting device spring	1	Stainless steel
6.4	Contact operation push button	1	Stainless steel
6.5	Contact type K	1/2	
6.5.1	Contact insulating support	1	Bakelite
6.6	Contact connecting board	1	
7.0	Type and serial number label	1	Aluminium

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Nomenclature N°:	Reference drawings N°:	Page N°
10VSTNOMR00-E	**10.T80.40 – 10.T15.40**	**1 of 2**

Product:	Revision N°
Pressure relief valves Series VST – VST-2 – VQT-2	**00 of 10.10.2011**

Pos.	Part Denomination	N°	Material & Reference
1.0	Valve body with mounting flange	1	Aluminium
1.0.1	Gasket seat – gasket supplied with valve:		Material according to type
	• VST 080 – dwg. 10.T80.40	2	OR6375 – Ø 94,62 x 5,34 mm OR6795 – Ø 202,56 x 5,34 mm
	• VST-2 150 – VQT-2 150 – dwg. 10.T15.40		OR8675 - Ø 170,8 x 6,99 mm OR61150 - Ø 291,46 x 5,34 mm
1.1	Gasket holding ring	1	Brass
1.2	Oil tightness and operation gaskets	1/2	Material according to type
1.2.1	Main oil tightness gasket		Reference
	• VST 080 – dwg. 10.T80.40	1	Dwg. 10.080.120
	• VST-2 150 – VQT-2 150 – dwg. 10.T15.40	1	Dwg. 10.150.135
1.2.2	Lateral operation gasket		Reference
	• VST 080 – dwg. 10.T80.40	1	OR6412 - Ø 104,12 x 5,34
	• VST-2 150 – VQT-2 150 – dwg. 10.T15.40	1	Dwg. 10.150.139
1.3	Connecting columns of flange and cover		
	• VST 080 – dwg. 10.T80.40	4	Stainless steel
	• VST-2 150 – dwg. 10.T15.40	8	
	• VQT-2 150 – dwg. 10.T15.40	6	
1.3.1	Columns holding screws and washers		Stainless steel
	• VST 080 – dwg. 10.T80.40	4	
	• VST-2 150 – dwg. 10.T15.40	8	
	• VQT-2 150 – dwg. 10.T15.40	6	
	Attention: never unscrew these screws		
1.4	Oil drain screw	1	Nickel coated brass
1.5	Oil drain screw gasket	1	Material according to type OR2018 - Ø 4,48 x 1,78 mm
2.0	Shutter	1	Aluminium
2.0.1	Contact activating nose		
2.1	Air vent screw	1	Nickel coated brass
2.2	Air vent screw gasket		Material according to type
	• Tipo VST 080 – VST-2 150 – VQT-2 150		OR2018 - Ø 4,48 x 1,78 mm
3.0	Pressure setting springs		
	• VST 080 – dwg. 10.T80.40	1	Spring steel, sandblasted and powder paint coated
	• VST-2 150 – VQT-2 150 – dwg. 10.T15.40	2	
4.0	Spring holding cover	1	Aluminium
6.0	Contact type K assembly		

ETI-Elettrindustria srl
EQUIPAGGIAMENTO TRASFORMATORI ITALIA
T: +39 0245475074 | F: +39 0245475787
E-mail: cobETI@eti-elettrindustria.it
Website: www.eti-elettrindustria.it

Nomenclature N°:	Reference drawings N°:	Page N°
10VSTNOMR00-E	**10.T80.40 – 10.T15.40**	**2 of 2**

Product:	Revision N°
Pressure relief valves Series VST – VST-2 – VQT-2	**00 of 10.10.2011**

Pos.	Part Denomination	N°	Material & Reference
6.1	VST 080 – Cable box VST-2 150 – VQT-2 150 – Contact casing	1	Aluminium
6.1.2	Contact case cable entry	1/2	Standard M20 thread Other threads on request
6.2	Contact case cover	1	Aluminium
6.2.1	Contact case cover gasket	3	Material according to type
6.2.2	Contact case cover holding screws	4	Stainless steel
6.3	VST 080 – Contact operating lever	1	Stainless steel
	VST-2 150 – VQT-2 150 – Contact operating slider Note: for type VST-2 150 – VQT-2 150 the optical indicator also operates the contact	1	
6.4	VST-2 150 – VQT-2 150 Contact operating push button	1	Stainless steel
6.5	Contact type K	1/2/3	
6.5.1	Contact insulating support	1	Bakelite
6.6	Contact connecting board	1	
7.0	Type and serial number label	1	Aluminium
8.0	Oil tight protection with flange for drain pipe		
8.1	Oil tight cover	1	Aluminium
8.1.1	Oil tight cover gasket		Material according to type
	• VST 080 – dwg. 10.T80.40	1	OR4825 - Ø 209,1 x 3,53 mm
	• VST-2 150 – VQT-2 150 – dwg. 10.T15.40	1	OR61150 - Ø 291,46 x 5,34 mm
8.1.2	Cover fixing screws	6 - 8	Stainless steel
8.2	Flange for drain pipe connection		
8.2.1	Flange gasket	1	OR8475 - Ø 120,0 x 6,99 mm
8.3	Optical indicator Note: for type VST-2 150 – VQT-2 150 the optical indicator also operates the contact	1	
8.3.1	Optical indicator holding screw	1	Stainless steel
9.0	Valve blocking plate for transport	1	Stainless steel
	Attention: Remove the plate when in service		

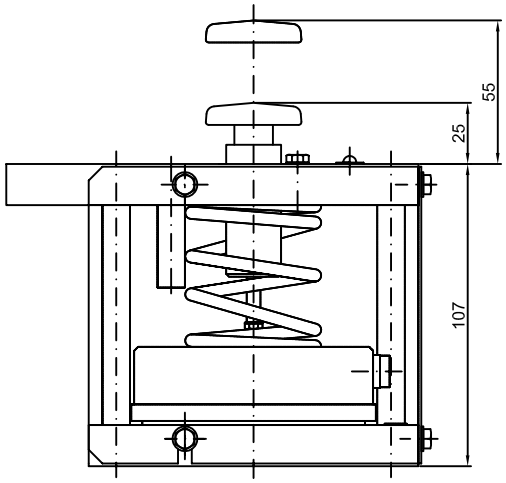

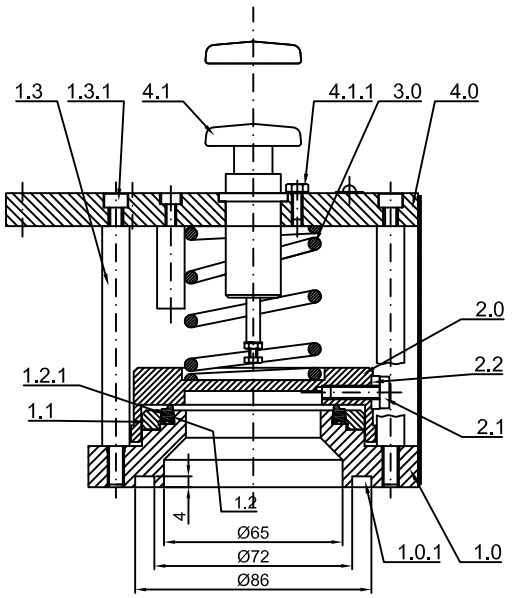



SEZ A-A

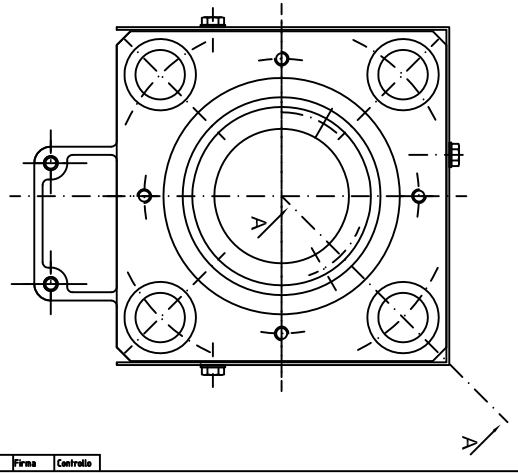

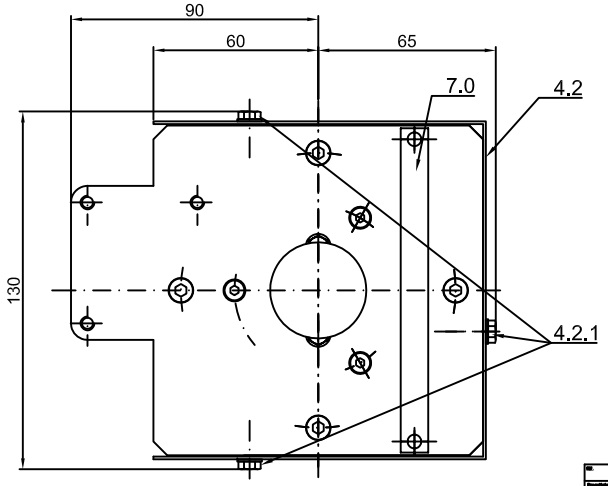

N. rev	Nota di revisione	Data	Firma	Controllo

Nº	Quantità	Titolo/Nome, designazione, materiale, dimensioni, ecc.				N. ordine / Riferimento
Progettato da		Controllato da	Approvato da + data	Nome file	Data	Scala
LZ					04/05/2011	1:1

ELETTRINDUSTRIA SRL
20032 CORMANO ITALY

Titolo/Nome: VALVOLA DI SICUREZZA / SAFETY VALVE / SOUPAPE DE SECURITE

TIPO - TYPE: VSQI 050

Numero disegno: 10.050.30

Modifica | Foglio

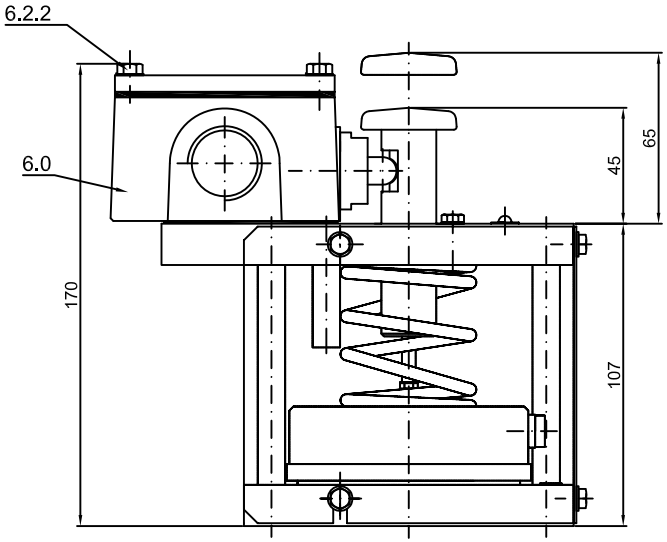

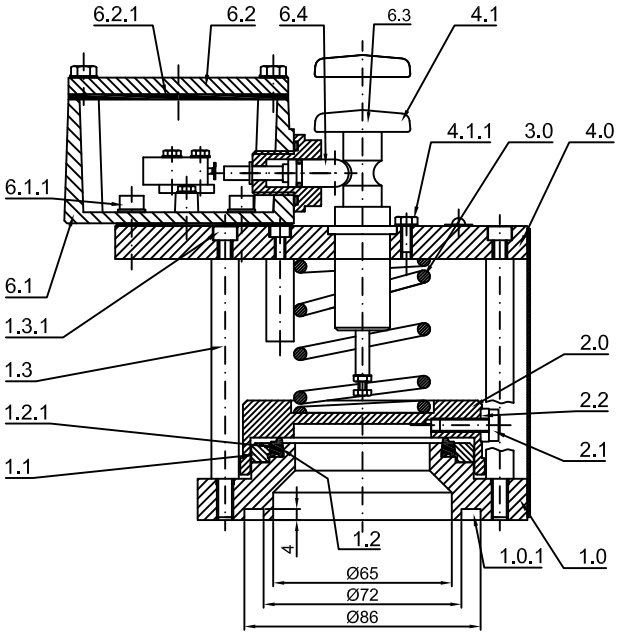

SEZ A-A



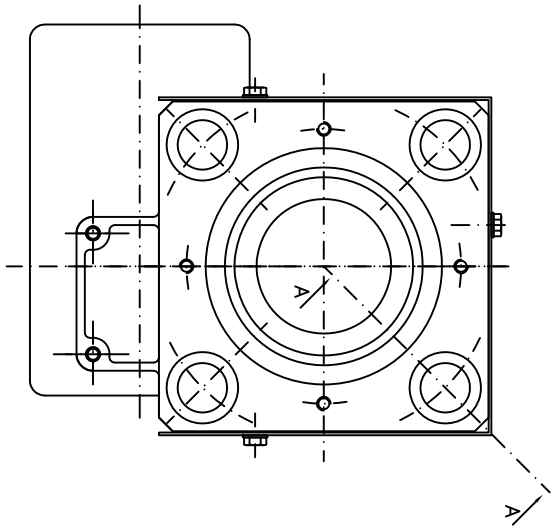

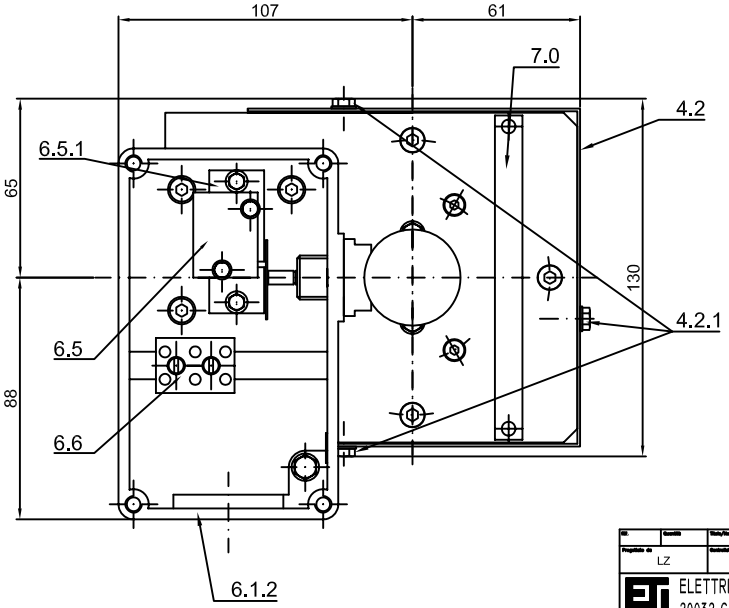

N. rev	Nota di revisione	Data	Firma	Controllo

Progettato da: LZ	Controllato da:	Approvato da - data:		Nome file:	Data: 04/05/2011	Scala: 1:1
ELETTRINDUSTRIA SRL 20032 CORMANO ITALY	Titolo/Nome: VALVOLA DI SICUREZZA SAFETY VALVE SOUPAPE DE SECURITE				TIPO - TYPE VSQI 050 K	
	Numero disegno: 10.050.40				Modifica:	Foglio:

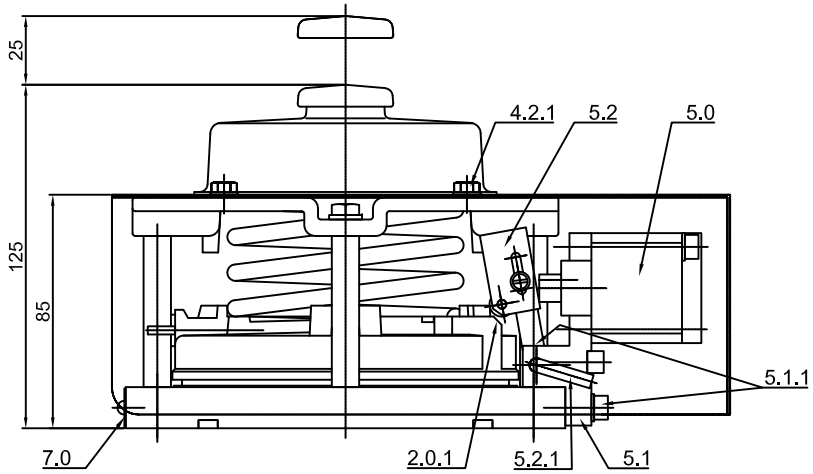

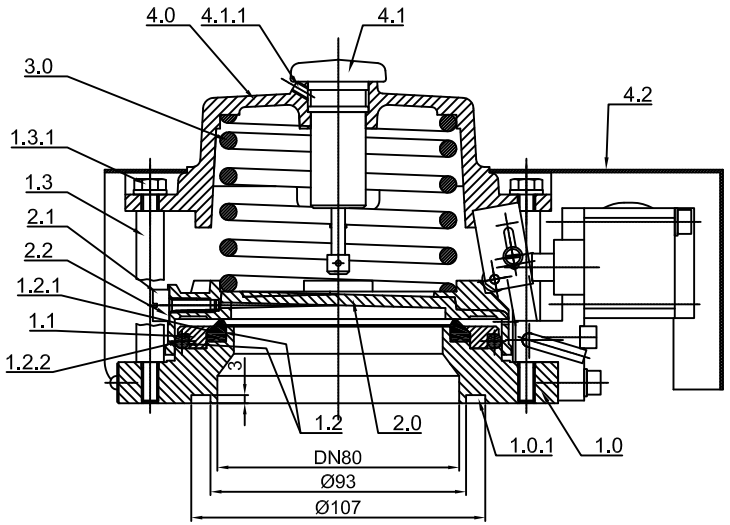

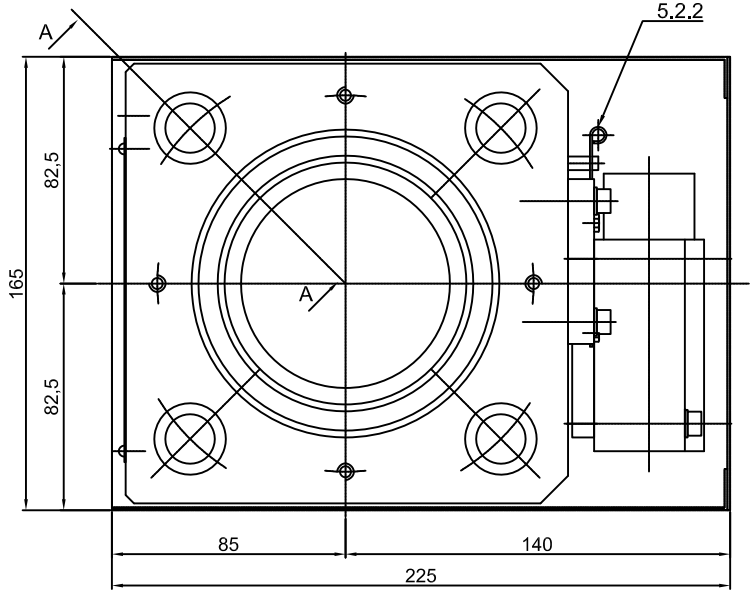

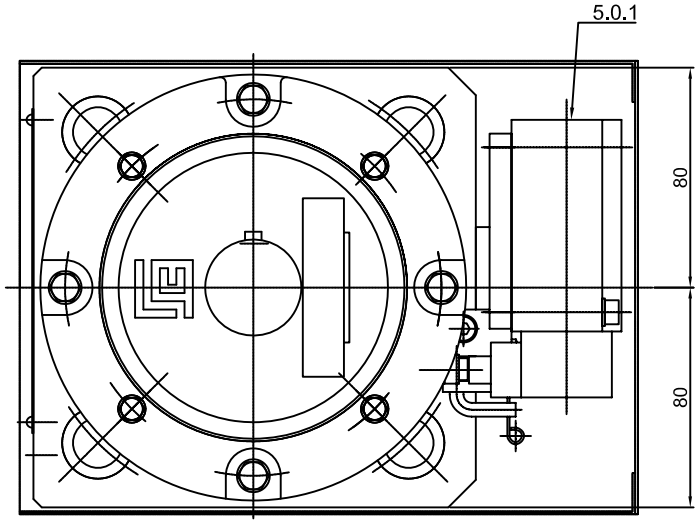

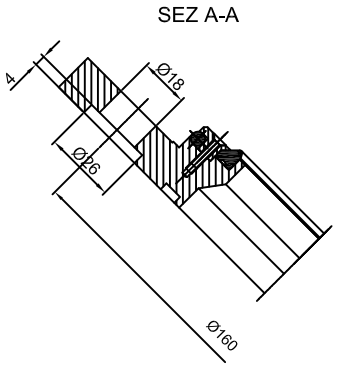

N. rev	Nota di revisione	Data	Firma	Controllo

Nº	Quantità	Descrizione, designazione, materiale, dimensioni, ecc.			N. ordine / Riferimento
Progettato da	Controllato da	Approvato da – data	Nome file	Data	Scala
LZ				04/05/2011	1:1
ELETTRINDUSTRIA SRL 20032 CORMANO ITALY		Titolo/Nome: VALVOLA DI SICUREZZA SAFETY VALVE SOUPAPE DE SECURITE		TIPO - TYPE VS 080 C	
		Numero disegno 10.080.30		Modifica	Foglio

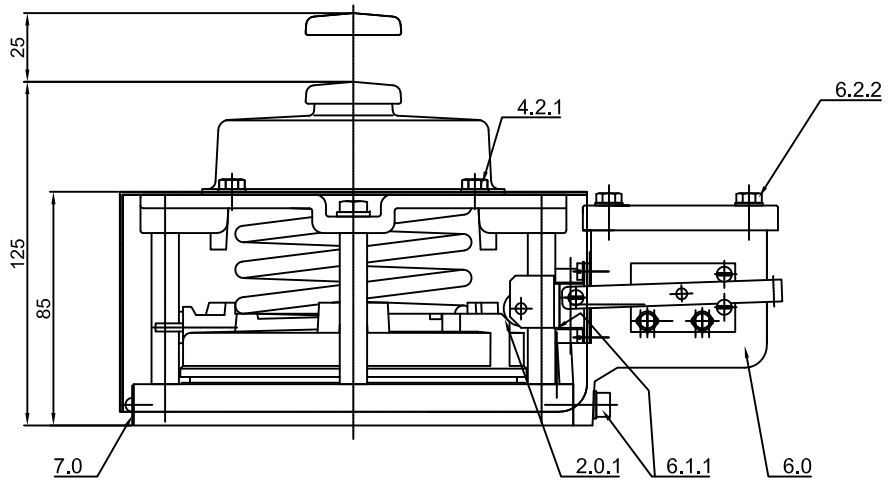

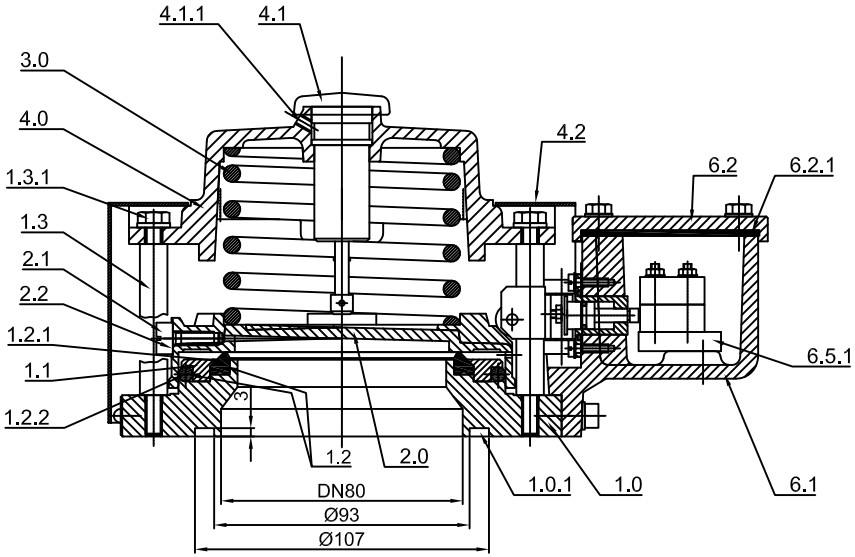

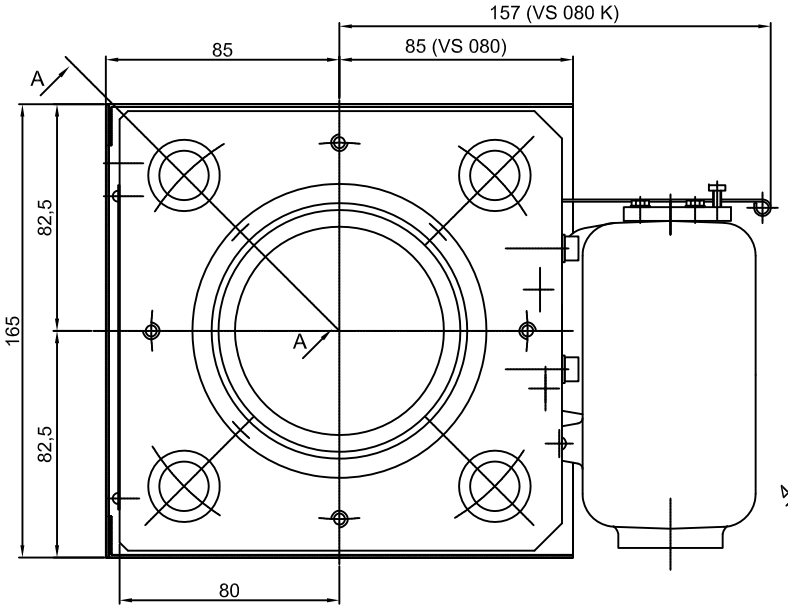

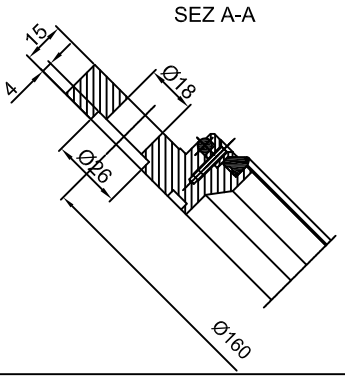

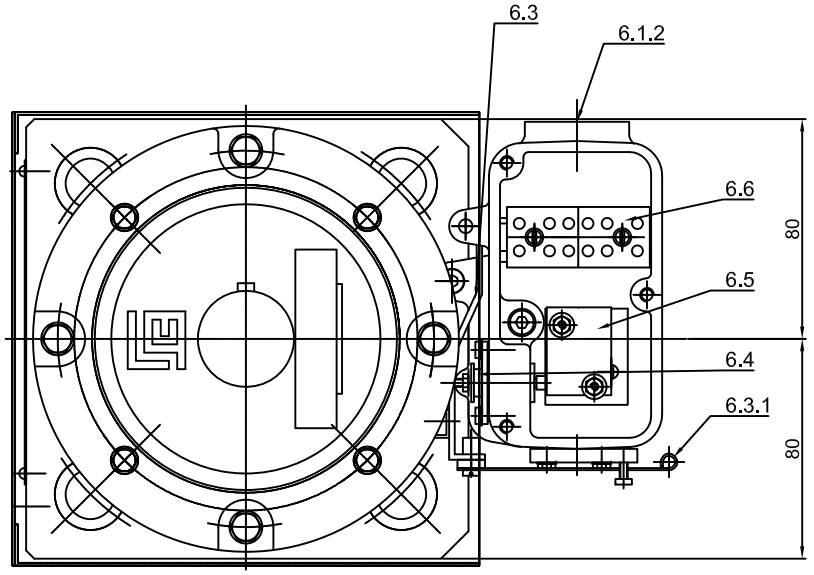

N. rev	Nota di revisione	Data	Firma	Controllo

Progettato da: LZ	Controllato da:	Approvato da - data:	Nome file:	Data: 04/05/2011	Scala: 1:1
ELETTRINDUSTRIA SRL 20032 CORMANO ITALY	Titolo/Nome: VALVOLA DI SICUREZZA SAFETY VALVE SOUPAPE DE SECURITE			TIPO - TYPE VS 080 - VS 080 K	
	Numero disegno: 10.080.40			Modifica:	Foglio:

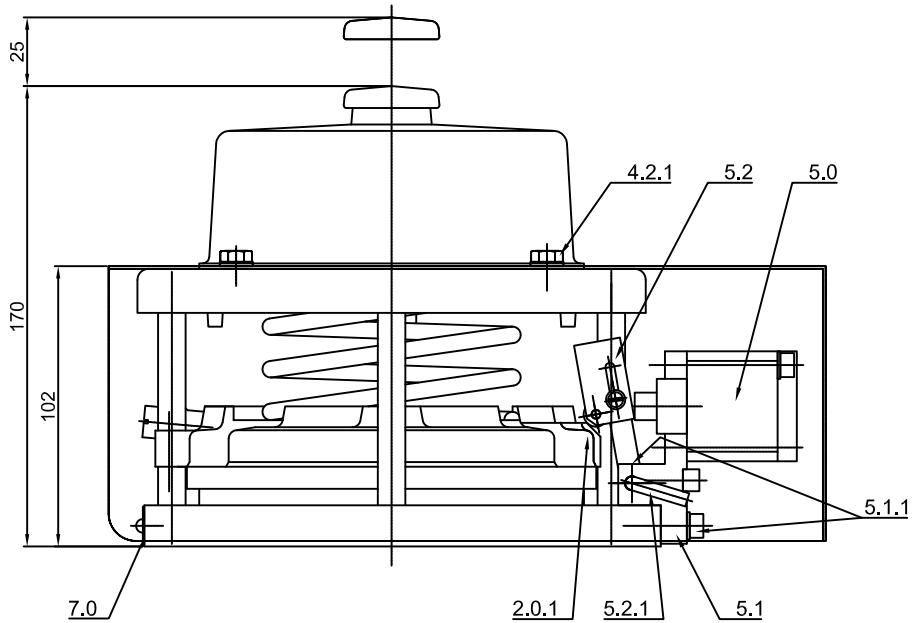

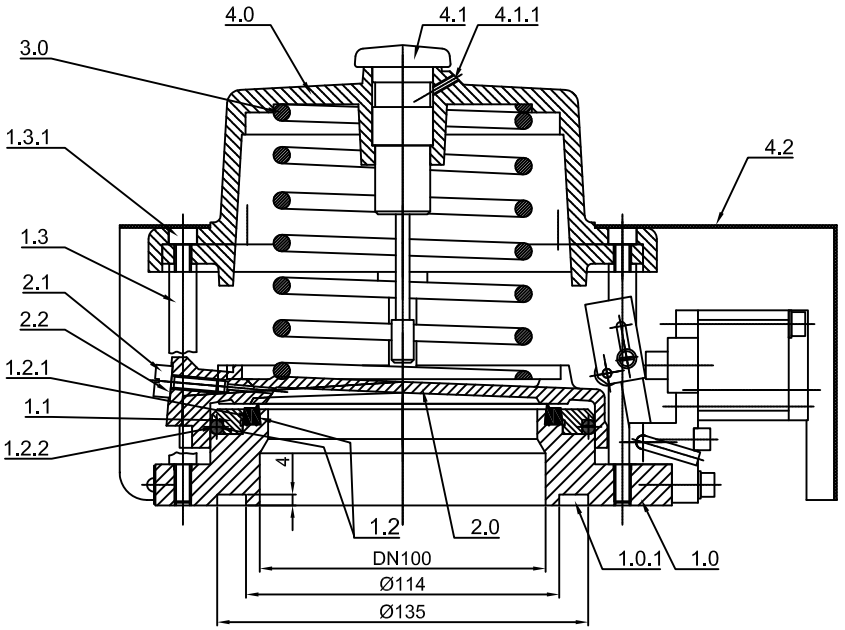

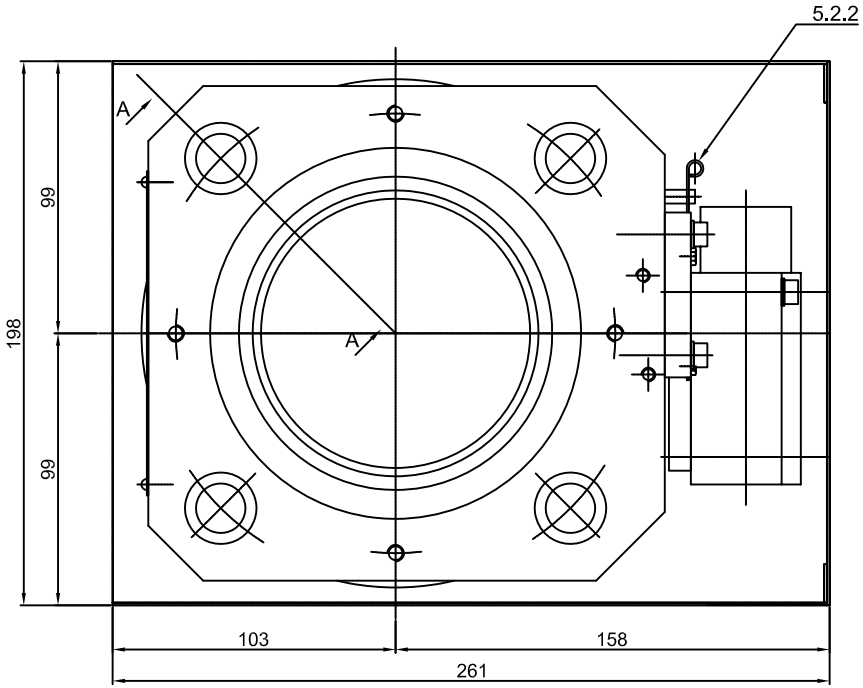

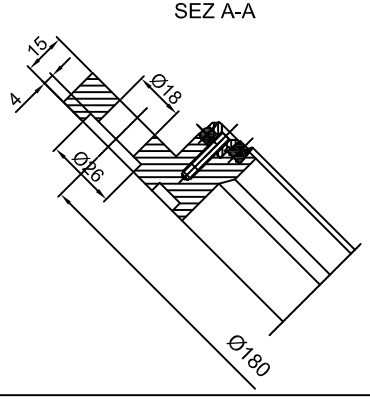

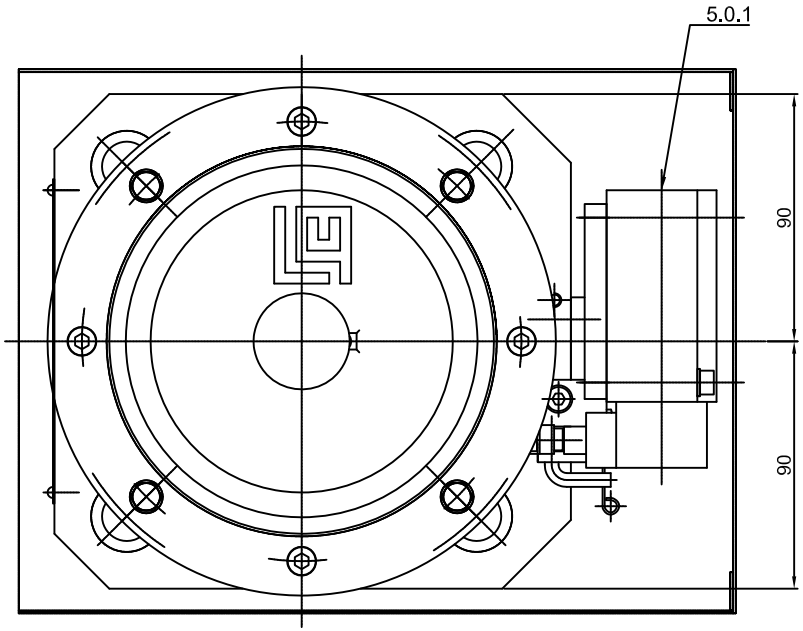

N. rev	Nota di revisione	Data	Firma	Controllo

Progettato da: LZ	Controllato da:	Approvato da - data:	Nome file:	Data: 04/05/2011	Scala: 1:1	
ELETTRINDUSTRIA SRL 20032 CORMANO ITALY	Titolo/Nome: VALVOLA DI SICUREZZA SAFETY VALVE SOUPAPE DE SECURITE			Numero disegno: 10.100.30	TIPO - TYPE VS 100 C	Modifica: Foglio:

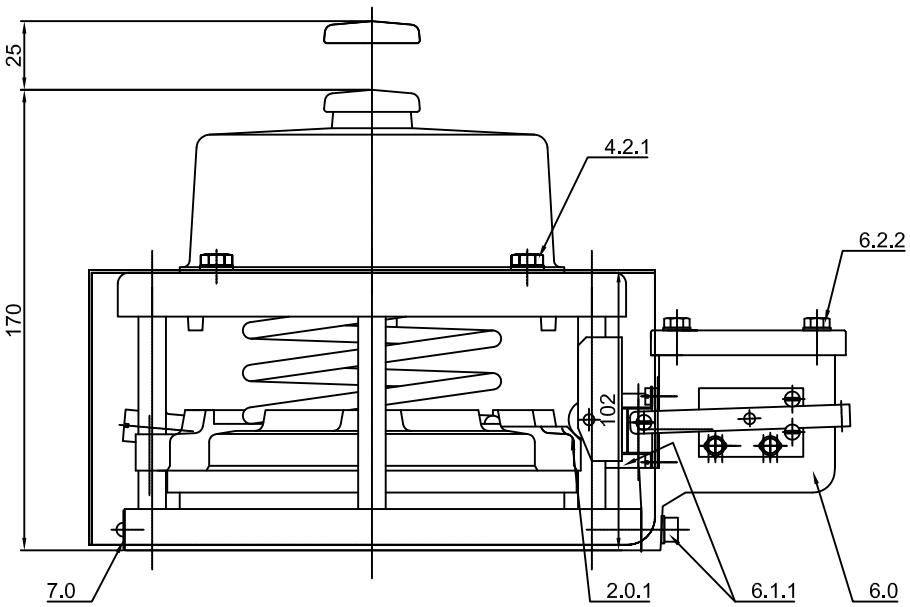

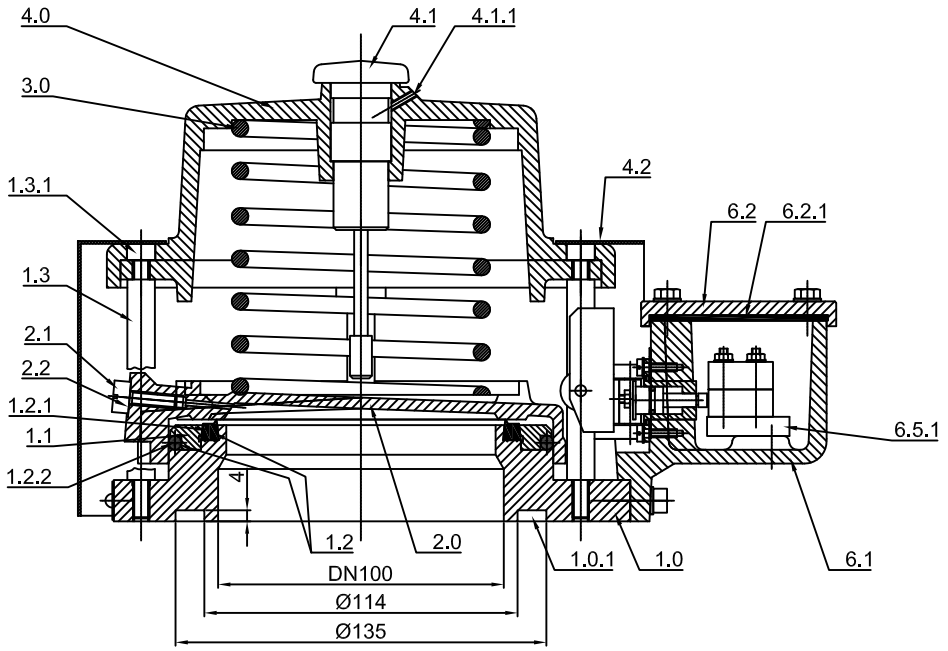

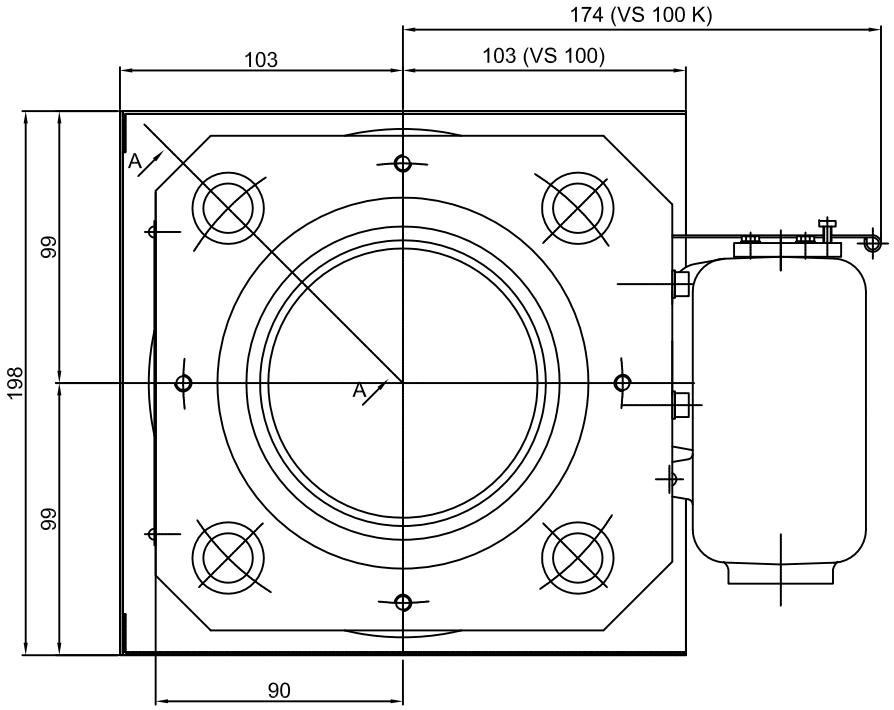

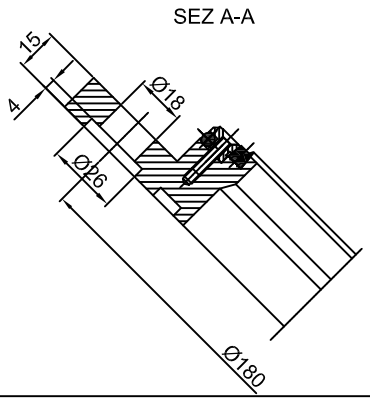

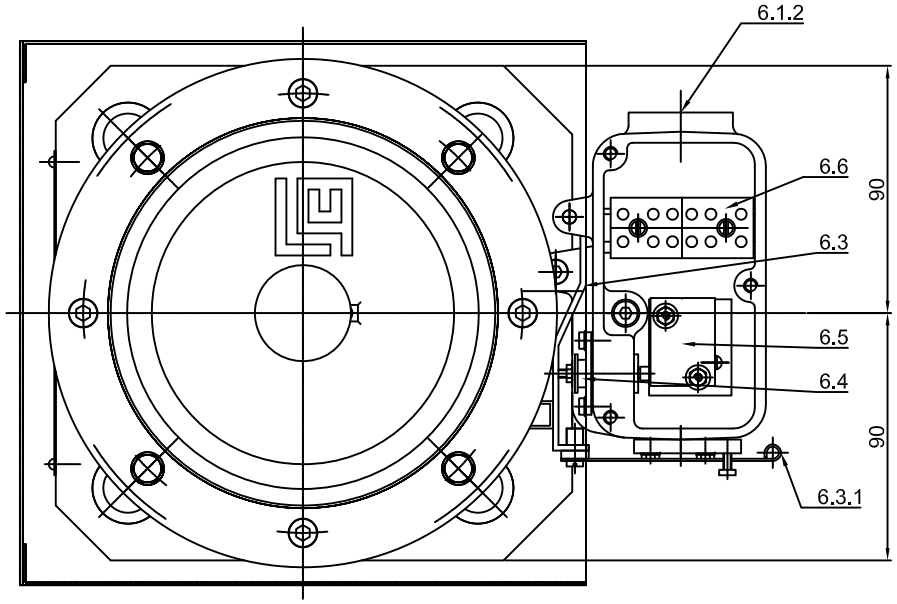

N. rev	Nota di revisione	Data	Firma	Controllo

Progettato da: LZ	Controllato da:	Approvato da - data:	Nome file:	Data: 04/05/2011	Scala: 1:1
ELETTRINDUSTRIA SRL 20032 CORMANO ITALY	Titolo/Nome: VALVOLA DI SICUREZZA SAFETY VALVE SOUPAPE DE SECURITE			TIPO - TYPE VS 100 - VS 100 K		
	Numero disegno: 10.100.40			Modifica:	Foglio:	

N. rev	Note di revisione	Data	Firma	Controllo

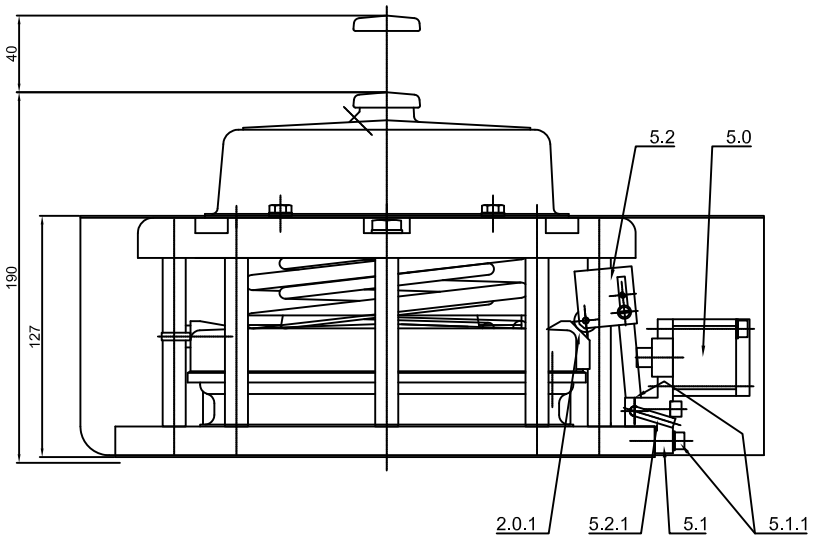

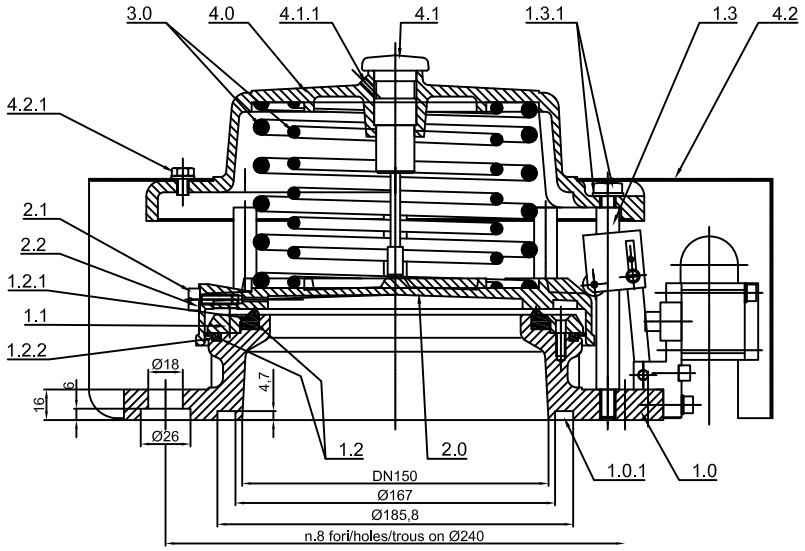

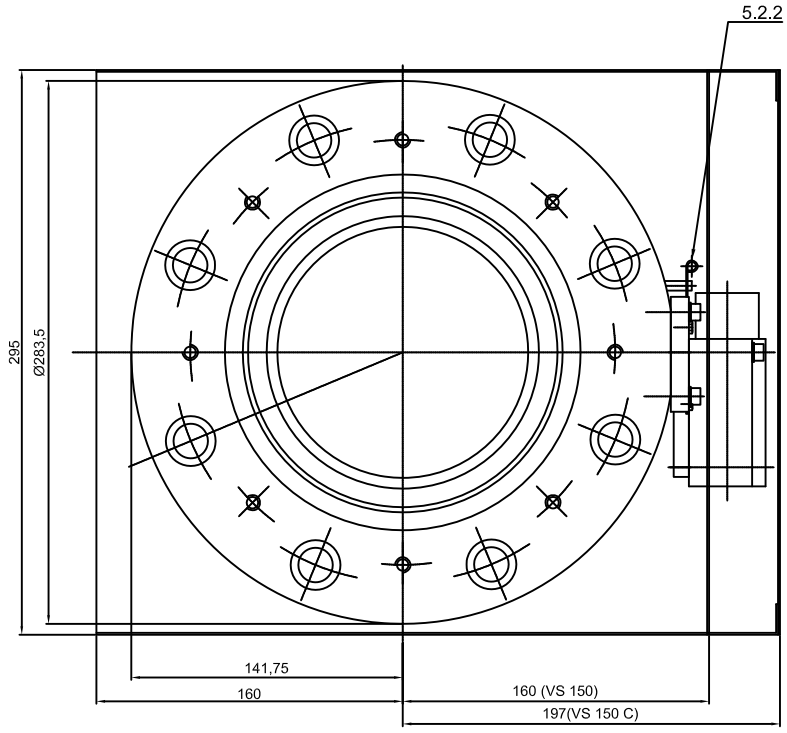

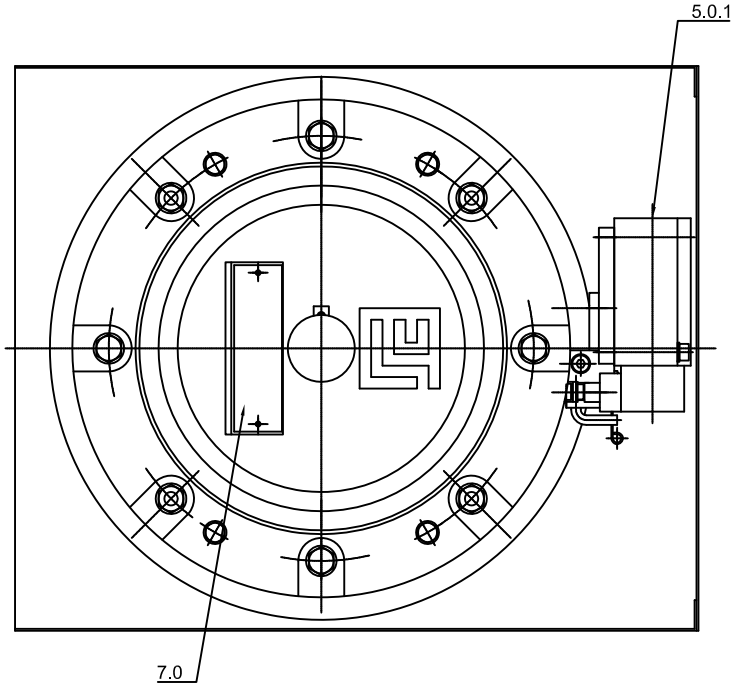

					04/05/2011	1:1

ELETTRINDUSTRIA SRL
20032 CORMANO ITALY

VALVOLA DI SICUREZZA
SAFETY VALVE
SOUPAPE DE SECURITE

TIPO - TYPE
VS 150
VS 150 C

10.150.30

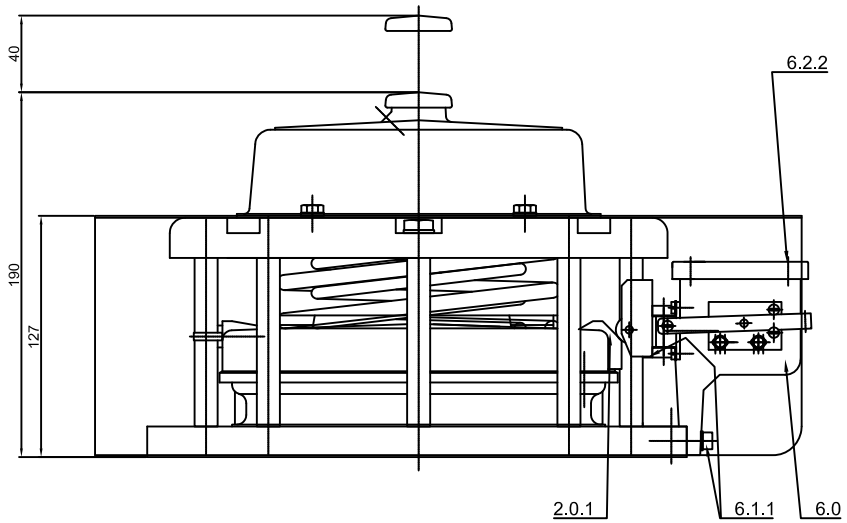
40
190
127
6.2.2
2.0.1
6.1.1
6.0

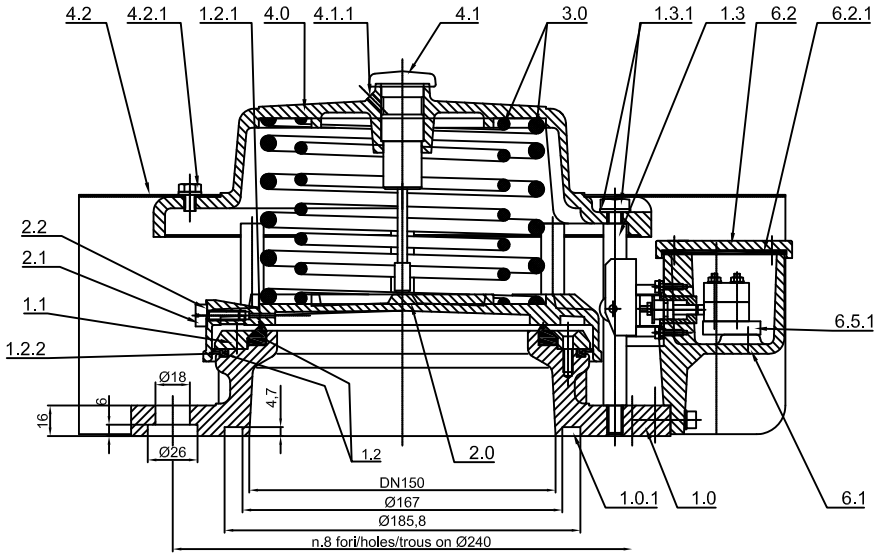
4.2
4.2.1
1.2.1
4.0
4.1.1
4.1
3.0
1.3.1
1.3
6.2
6.2.1
2.2
2.1
1.1
1.2.2
6.5.1
Ø18
6
16
4.7
Ø26
1.2
2.0
DN150
Ø167
Ø185,8
n.8 fori/holes/trous on Ø240
1.0.1
1.0
6.1

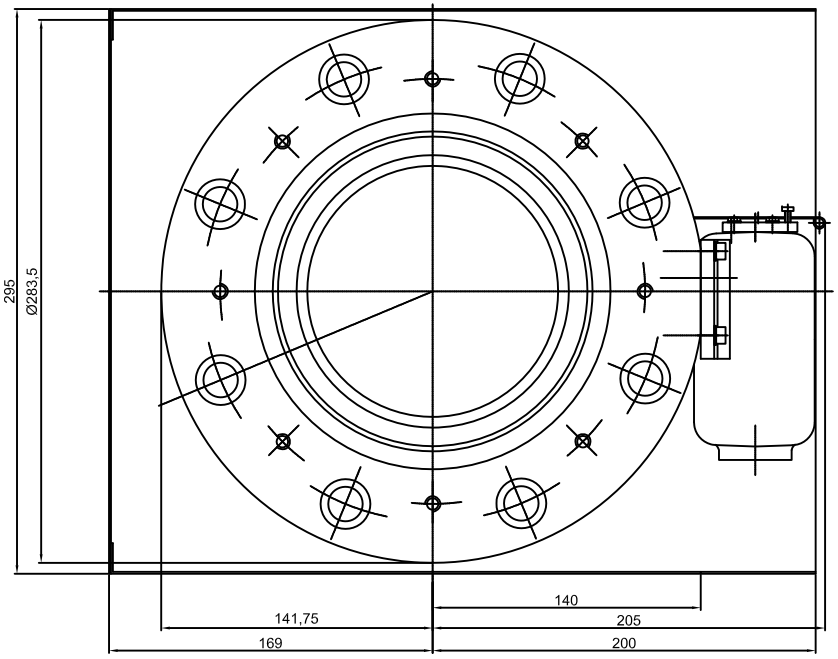
295
Ø283,5
140
141,75
205
169
200

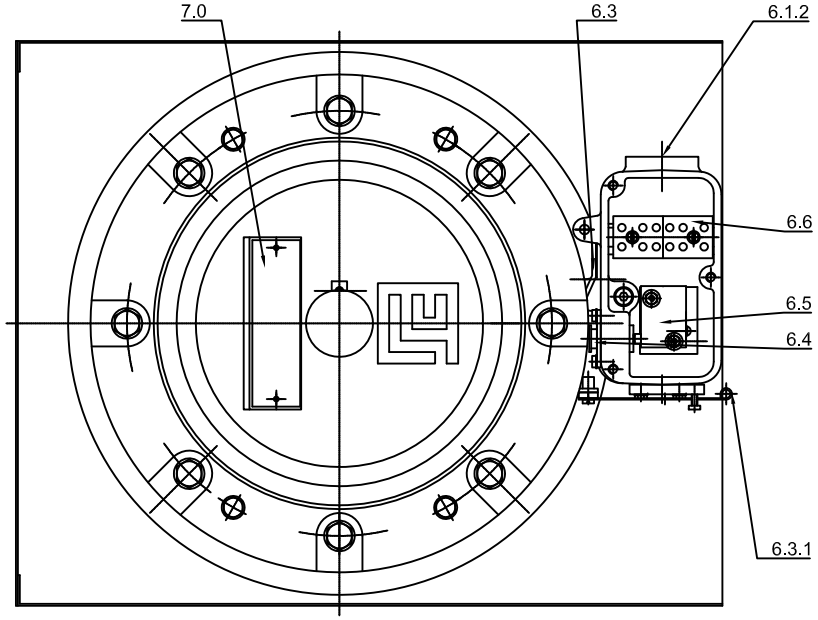
7.0
6.3
6.1.2
6.6
6.5
6.4
6.3.1

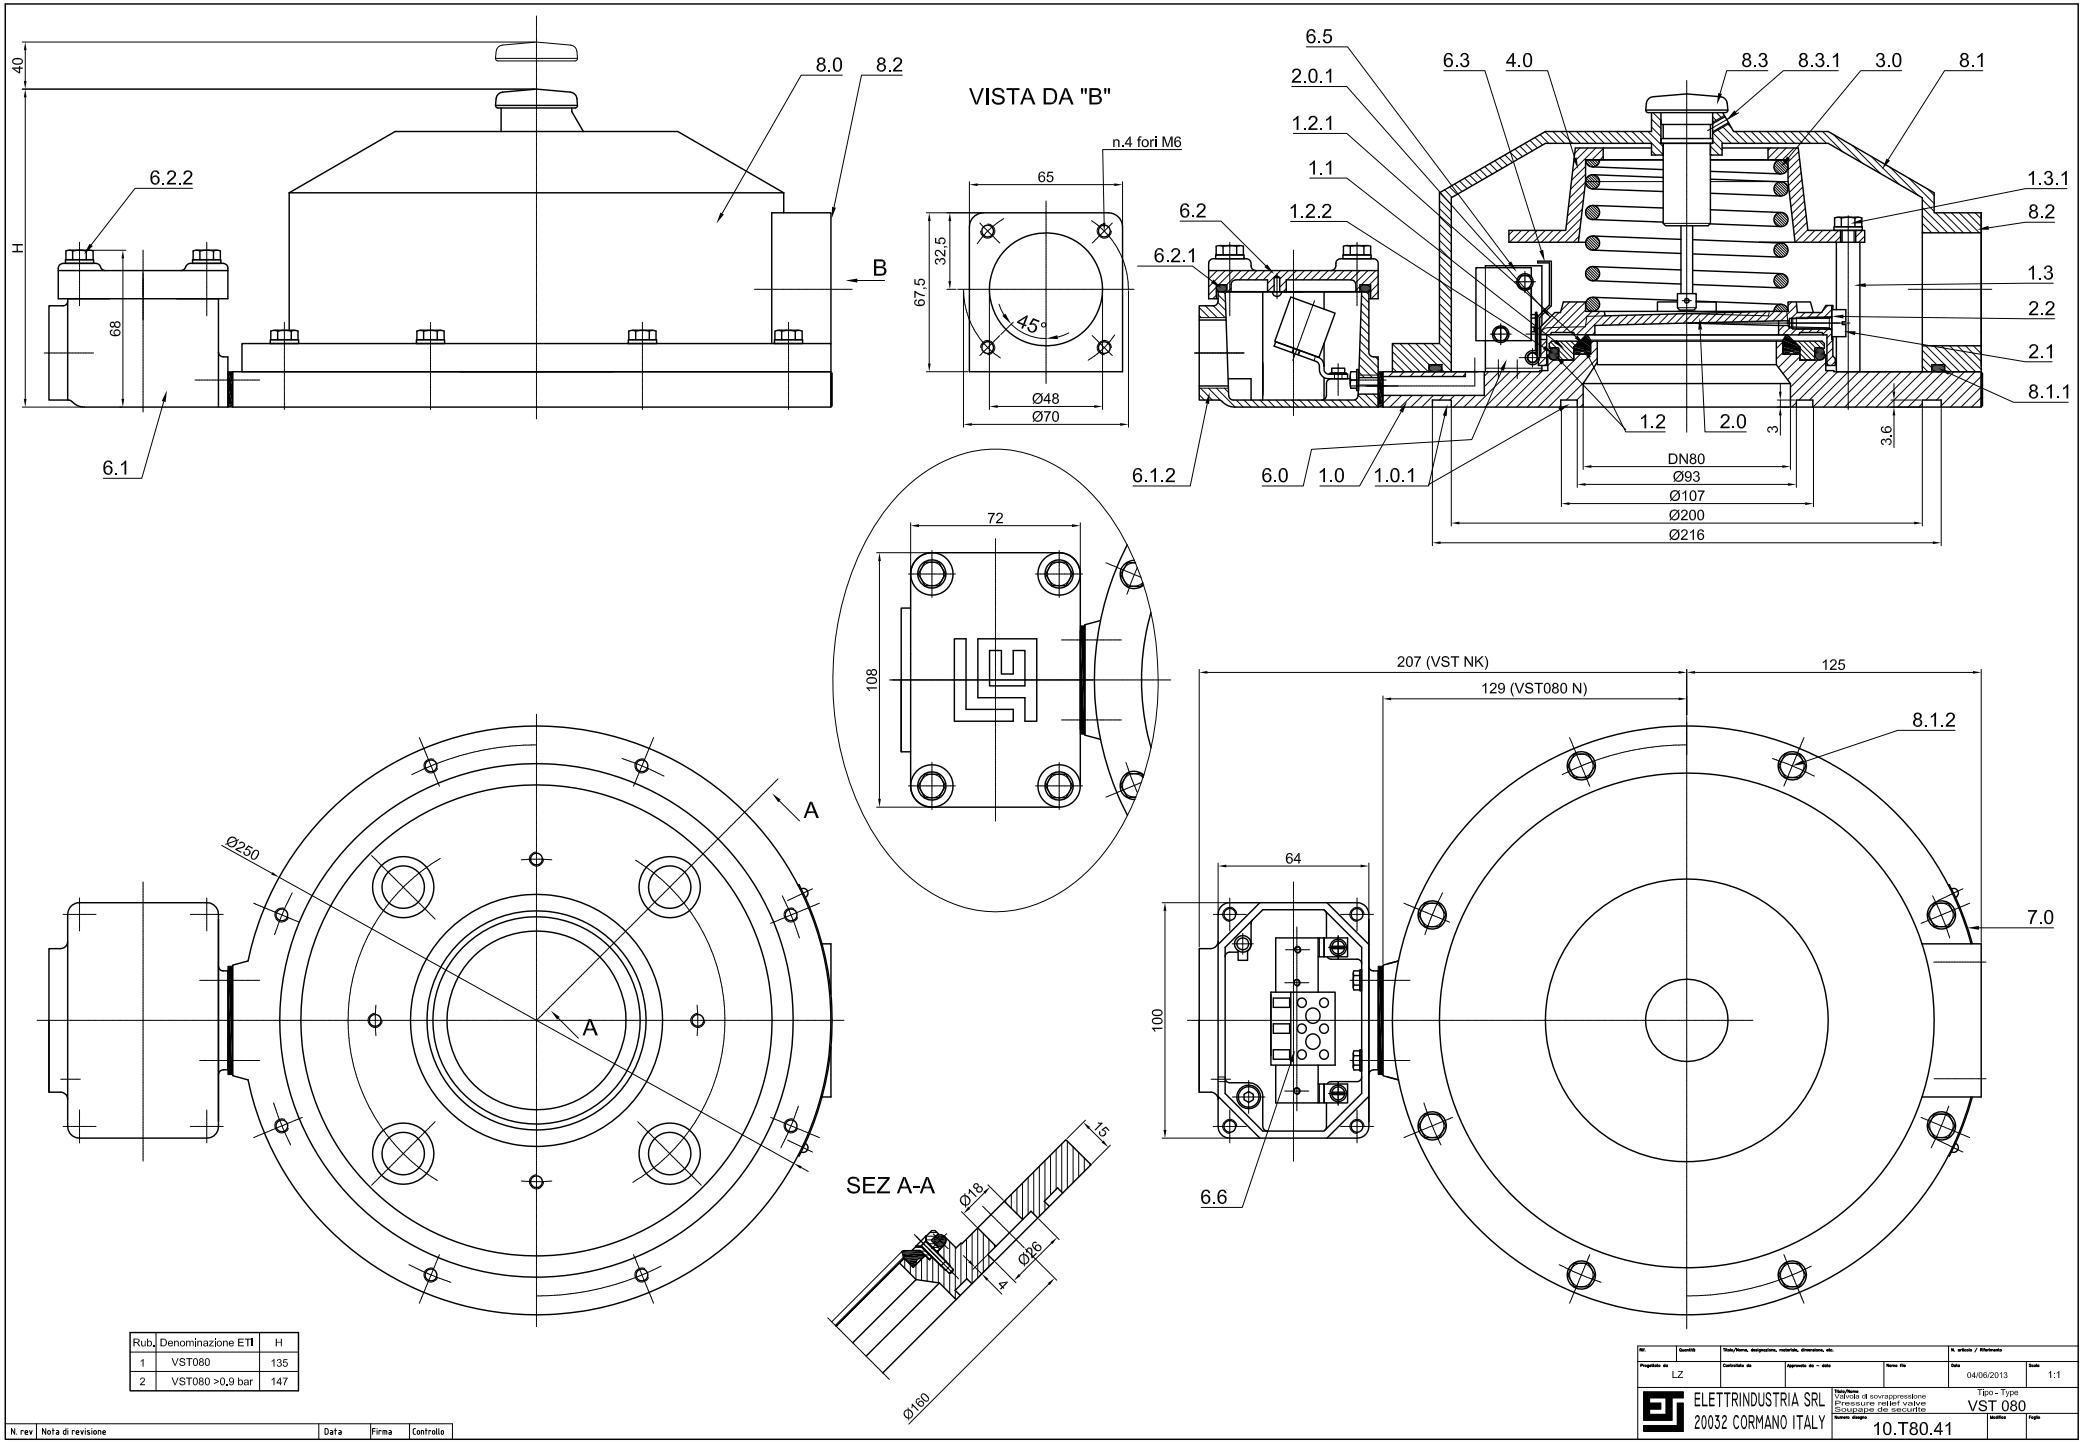

Rub.	Denominazione ETI	H
1	VST080	135
2	VST080 >0,9 bar	147

N. rev	Nota di revisione	Data	Firma	Controllo

Rif.	Quantità	Titolo/Nome, designazione, materiale, dimensione, etc.	N. articolo / Riferimento

Progettato da	Controllato da	Approvato da — data	Nome file	Data	Scala
LZ				04/06/2013	1:1

ELETTRINDUSTRIA SRL
20032 CORMANO ITALY

Titolo/Nome
Valvola di sovrappressione
Pressure relief valve
Soupape de securite

Tipo - Type
VST 080

Numero disegno
10.T80.41

Modifica | Foglio

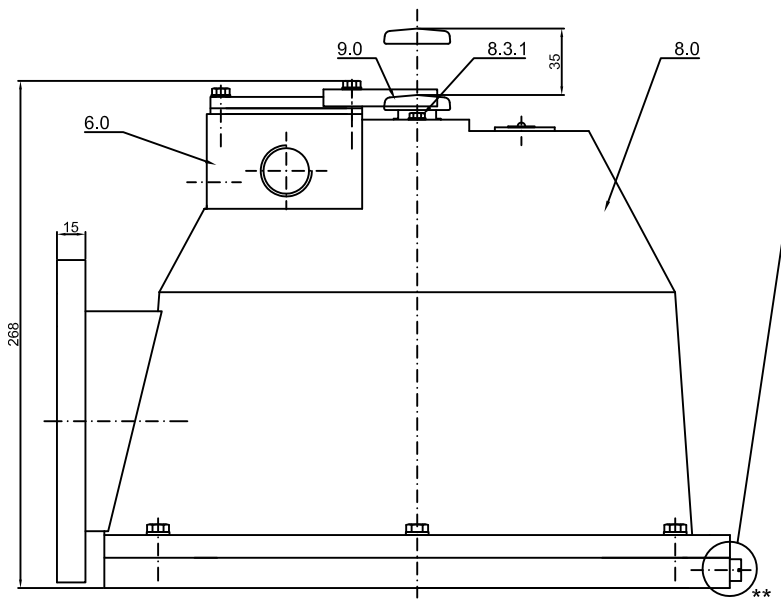

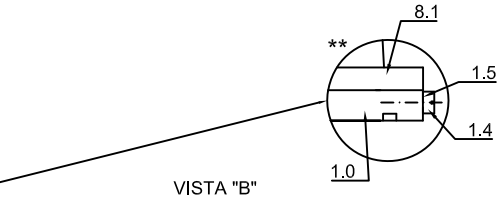

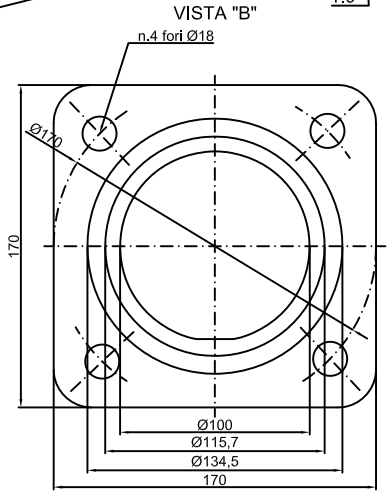

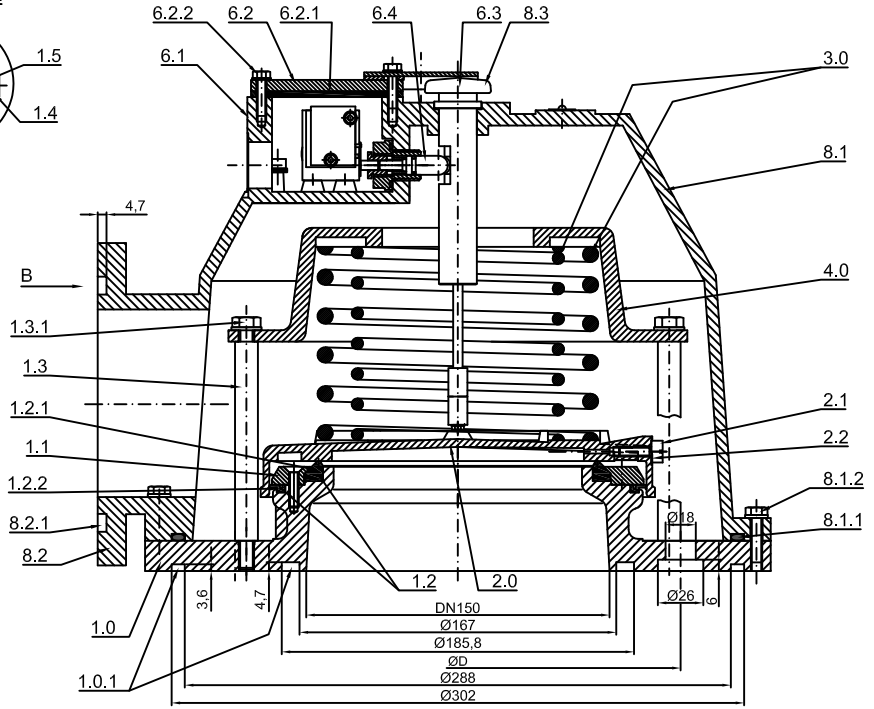

Scala 1:2

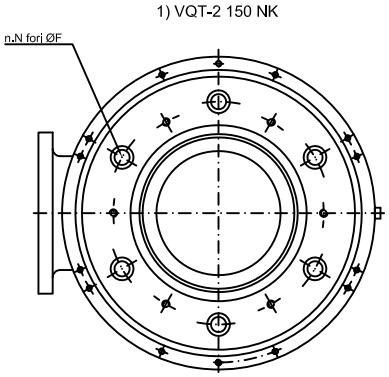

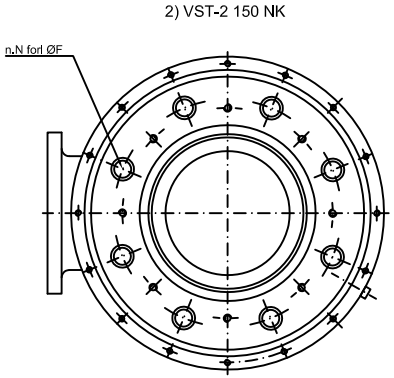

Rub.	Denominazione ETI	N°.fori	ØF	ØD
1	VQT-2 150 NK	6	18	235
2	VST-2 150 NK	8	18	240

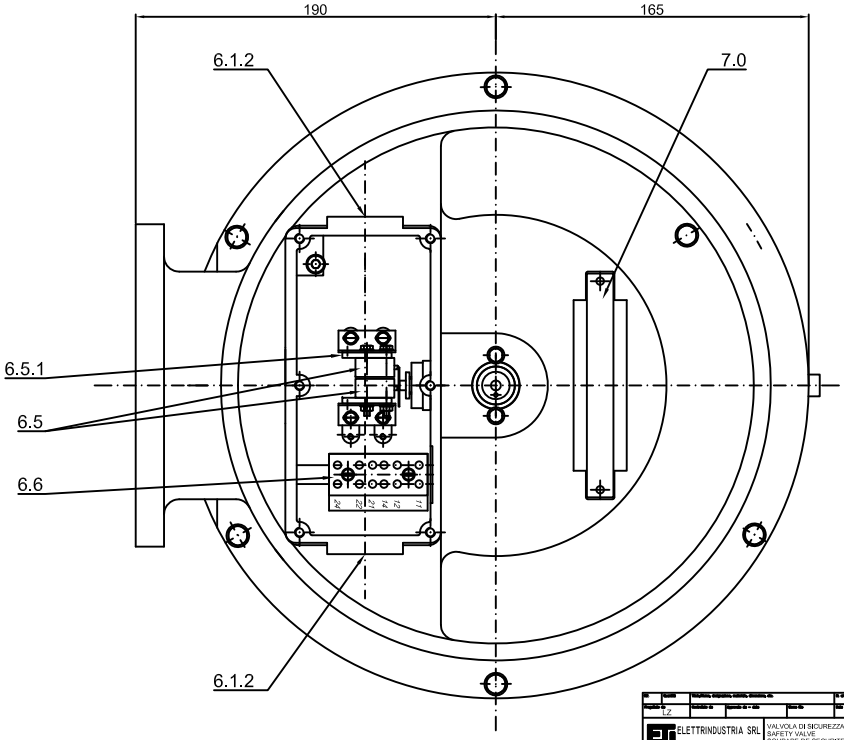

ELETTRINDUSTRIA SRL
20032 CORMANO ITALY
VALVOLA DI SICUREZZA
SAFETY VALVE
SOUPAPE DE SECURITE
04/05/2011
1:1
TIPO - TYPE
VQT-2 150
VST-2 150
10.T15.40