

MESSKO® BeTech TEMPERATURE INDICATORS ORDERING SPECIFICATIONS.





Project/Reference: _____

Type of instrument	
<input type="checkbox"/>	Oil temperature indicator
<input type="checkbox"/>	Winding temperature indicator with matching resistance MRB110-1 (CTmax = 2.2 A)
<input type="checkbox"/>	Winding temperature indicator with matching resistance MRB110-2 (CTmax = 2.65 A)
<input type="checkbox"/>	Winding temperature indicator without matching resistance (CTmax = 2.3 A)

Measuring range	
<input type="checkbox"/>	0 ... +150 °C
<input type="checkbox"/>	-20 ... +130 °C
<input type="checkbox"/>	0 ... +160 °C
<input type="checkbox"/>	-40 ... +160 °C
<input type="checkbox"/>	High accuracy range (otherwise standard)
Other on request	

Bulb type		
<input type="checkbox"/>	Square flange 4 holes	no. 1
<input type="checkbox"/>	G3/4"B (=BSP3/4")	no. 2
<input type="checkbox"/>	G3/4"B Female thread	no. 2F
<input type="checkbox"/>	G1"B (=BSP1)	no. 5
<input type="checkbox"/>	7/8" - 14UNF, bulb Ø 12.2 mm	no. 6
<input type="checkbox"/>	G3/4"B (=BSP3/4)	no. 8
<input type="checkbox"/>	G1"B, bulb Ø 12 mm	no. 9
<input type="checkbox"/>	G3/4", bulb Ø 12 mm	no. 10
<input type="checkbox"/>	M22 x 1.5 mm	no. 22
<input type="checkbox"/>	M27 x 2 mm	no. 27

Analog output	
<input type="checkbox"/>	4 - 20 mA
<input type="checkbox"/>	4 - 20 mA and 0 - 5 V
<input type="checkbox"/>	0 - 5 V
<input type="checkbox"/>	Pt100
<input type="checkbox"/>	No analog output
Other on request	

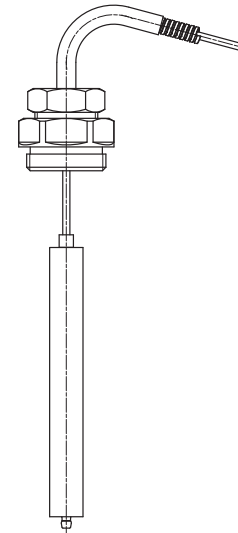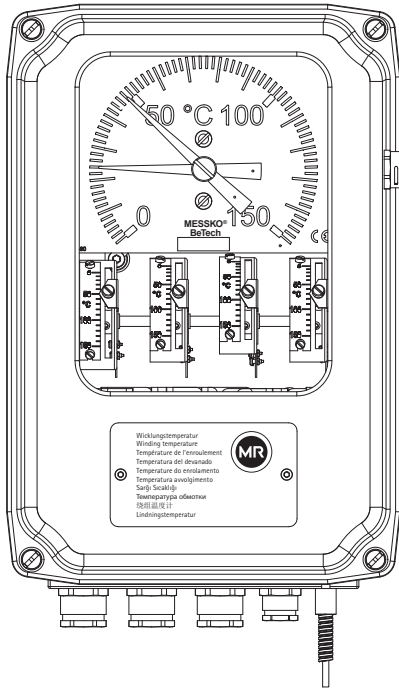

Color	
<input type="checkbox"/>	RAL 7033 (standard)
<input type="checkbox"/>	RAL 7038 (similar ANSI 70 light grey)
<input type="checkbox"/>	RAL 7033 Offshore
Other colors on request	

Length of capillary tube	
<input type="checkbox"/>	4 m capillary tube
<input type="checkbox"/>	6 m capillary tube
<input type="checkbox"/>	8 m capillary tube
<input type="checkbox"/>	10 m capillary tube
<input type="checkbox"/>	12 m capillary tube
<input type="checkbox"/>	2 to 20 m capillary tube

Color inscription	
<input type="checkbox"/>	Black text on white instrument dial
<input type="checkbox"/>	White text on black instrument dial
Other on request	

Microswitches	
<input type="checkbox"/>	2 Microswitches
<input type="checkbox"/>	3 Microswitches
<input type="checkbox"/>	4 Microswitches
<input type="checkbox"/>	5 Microswitches
<input type="checkbox"/>	MBO microswitches (otherwise stand. type)
Other on request	

Cable gland	
<input type="checkbox"/>	M20 x 1.5
<input type="checkbox"/>	Pg16 converter
Other connections on request	

Window	
<input type="checkbox"/>	Laminated safety glass (standard)
<input type="checkbox"/>	UV-stabilized poly carbonate (optional)

Housing	
<input type="checkbox"/>	IP55: Standard mounting
<input type="checkbox"/>	IP65: Standard mounting
<input type="checkbox"/>	IP55: Seismic style mounting
<input type="checkbox"/>	IP65: Seismic style mounting
<input type="checkbox"/>	IP55: Polar execution
<input type="checkbox"/>	IP65: Polar execution
Other on request	

Please enclose this order form filled in the order.